



DPYF08A-3

DPYF14A-3

Features

- General socket,08A:10A, 14A:7A.
- Green product RoHS.

DPYF 08A-3-00A (H)

Product Category:DPYF

Pin Number:08A,14A

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

	DPYF08A-3	DPYF14A-3
Product type	DPYF08A-3	DPYF14A-3
Rated current	10A	7A
Rated voltage	300V	
Coil/Contact dielectric voltage	2000V/S	
Dielectric voltage between contact	2000V/S	
Screw torque	1,0Nm	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-40~+65°C	
Weight	34g	56g


Supporting relays and accessories

Product type	Relay	Module	Plastic pull class	Metal clamp spring
DPYF08A-3	DRPE-2CH	—	—	Wear
DPYF14A-3	DRPE-4C	—	—	Wear

Overall Dimensions, Wiring Diagrams

DPYF08A-3

DPYF14A-3

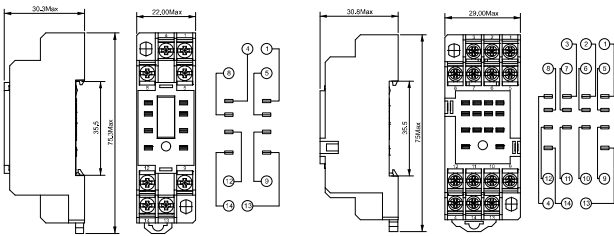

DPYF08A-E3

DPYF14A-E3

Features

- Protective socket,08A:10A,14A:7A.
- Green product RoHS.

DPYF 08A-E 3-00A (H)

Product Category:DPYF

Pin Number:08A,14A

Protect way:E:Protective structure

Colour:3:Black

RoHS:H

Performance Parameters

Technical parameters

	DPYF08A-E3	DPYF14A-E3
Product type	DPYF08A-E3	DPYF14A-E3
Rated current	10A	7A
Rated voltage	300V	
Coil/Contact dielectric voltage	2000V/S	
Dielectric voltage between contact	2000V/S	
Screw torque	1,0Nm	
External connection wire	20-14AWG/0.5-2.5mm ²	
Ambient temperature	-40~+65°C	
Weight	34g	56g

Supporting relays and accessories

Product type	Relay	Module	Plastic pull class	Metal clamp spring
DPYF08A-E3	DRPE-2CH	—	—	Wear
DPYF14A-E3	DRPE-4C	—	—	Wear

Popular Assembled module

24VDC 2+SPDT: DRPE5-2CH-024-07A(H) 220/230VAC 2+SPDT: DRPE5-2CH-0220-07A(H)

24VDC 4+SPDT: DRPE5-4C-024-07A(H) 220/230VAC 4+SPDT: DRPE5-4C-0220-07A(H)

Overall Dimensions, Wiring Diagrams

DPYF08A-E3

DPYF14A-E3

