Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负担赔偿责任。本公司保留对涉及实用、专利新型和外观专利的所有权利。

未注公差/General tolerances(mm)

0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

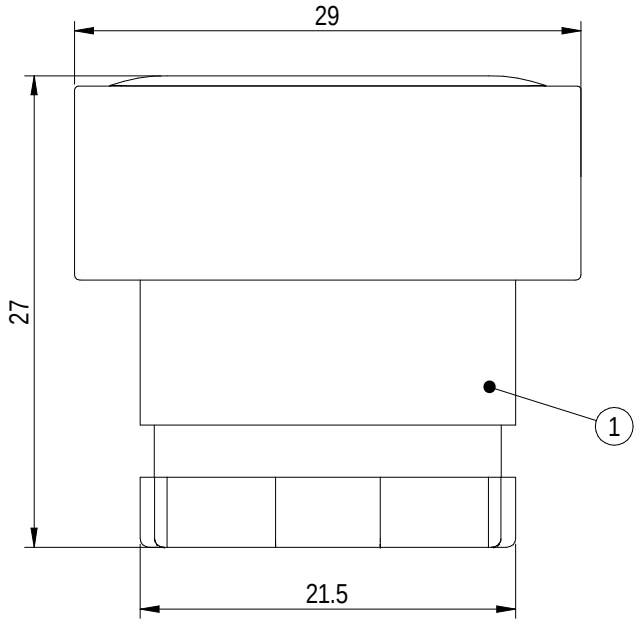

DT22MU - FR / X

(Series No.)

(Type of actuator):FR:flat reset button head

(Color):RD:(Red)
GN:(Green)
YE:(Yellow)
WH:(White)
BU:(Blue)

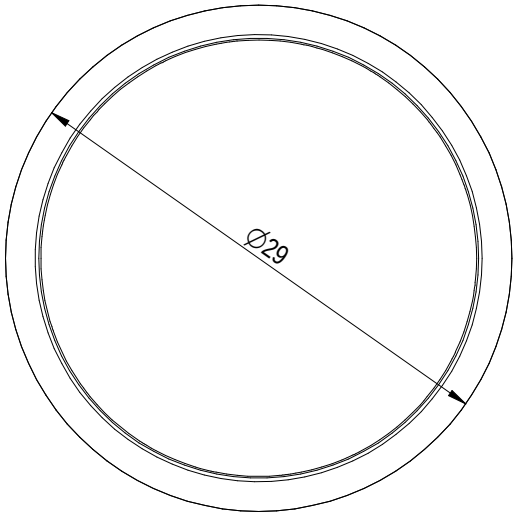

ITEM	NAME OF PART	MATERIAL	NOTES
1	Button head	/	/

使用温度范围/Operating temperature(°C)	-25~+55(无冰冻)
使用湿度范围/Operating humidity(%RH)	45~85
符合RoHS环保要求/Conform to RoHS	Yes
标准颜色编号/Standard color number: PANTONE / RAL	/

DEGSON

APPD:	LGL	2024.12.02
CHKD:	MEK	2024.12.02
DRFT:	GXJ	2024.12.02

A4 mm (inch)

MATERIAL: | SURFACE/COLOR:

MAT NO./REV: / 00 | MAT STATUS: 样品

NAME: DT22MU-FR/X

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200323905	CUSTOMER DRAWING	work	2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00		New Drawing	GXJ	2024.12.02